




AD45-10T Series

DC Axial Fan



45x45x10mm

Specification:

- **Air Flow** : 7 ~ 8 CFM
- **Housing** : Thermoplastic PBT, UL94V-0
- **Impeller** : Thermoplastic PBT, UL94V-0
- **Bearing** : Ball or Sleeve
- **Termination** : Lead Wire UL2468 AWG#26 or Equivalent
Red Wire Positive (+); Black Wire Negative (-);
Yellow Wire Function (3)
- **Operating Temperature** : -10°C to + 70°C for Sleeve Type
-20°C to + 80°C for Ball Type
- **Weight** : 14.7g
- **Function** : *Function type is optional*
P: Protection (Automatic restart when lock up removed)
A: Alarm
I: Inspect

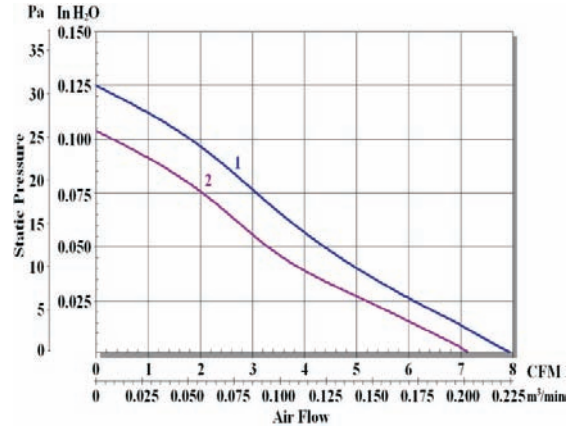

Outline Dimension

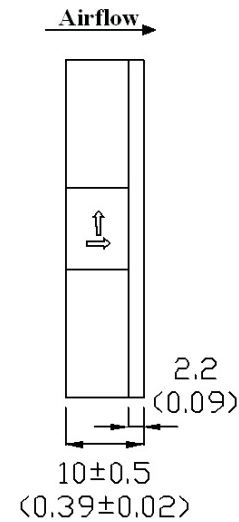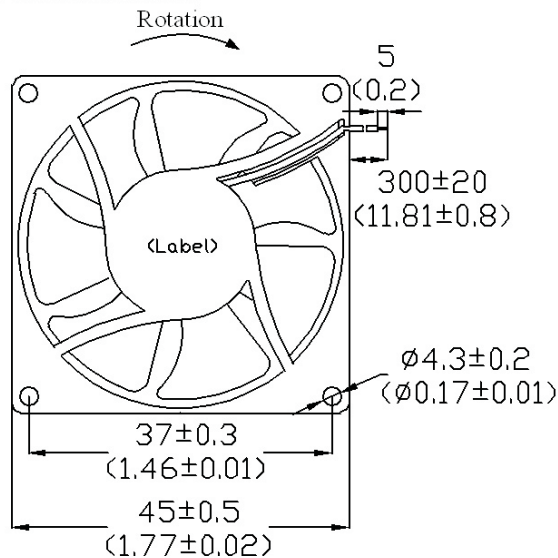

Unit:mm(Inch)

Item Code	Rated Voltage	Rated Current (A)	Input Power (W)	Speed RPM	Max. Air Flow		Noise dB(A)
					CFM	m ³ /min	
AD05V45-10T-FPH-B7-N1	5V	0.19	1.0	6000	8	0.22	31
AD05V45-10T-FPH-B7-N2	5V	0.15	0.8	5000	7	0.20	28
AD12V45-10T-FPH-B7-N1	12V	0.11	1.3	6000	8	0.22	31
AD12V45-10T-FPH-B7-N2	12V	0.10	1.2	5000	7	0.20	28
AD24V45-10T-FPH-B7-N1	24V	0.06	1.5	6000	8	0.22	31